


HOSE REEL

Carry on Hose reel GP

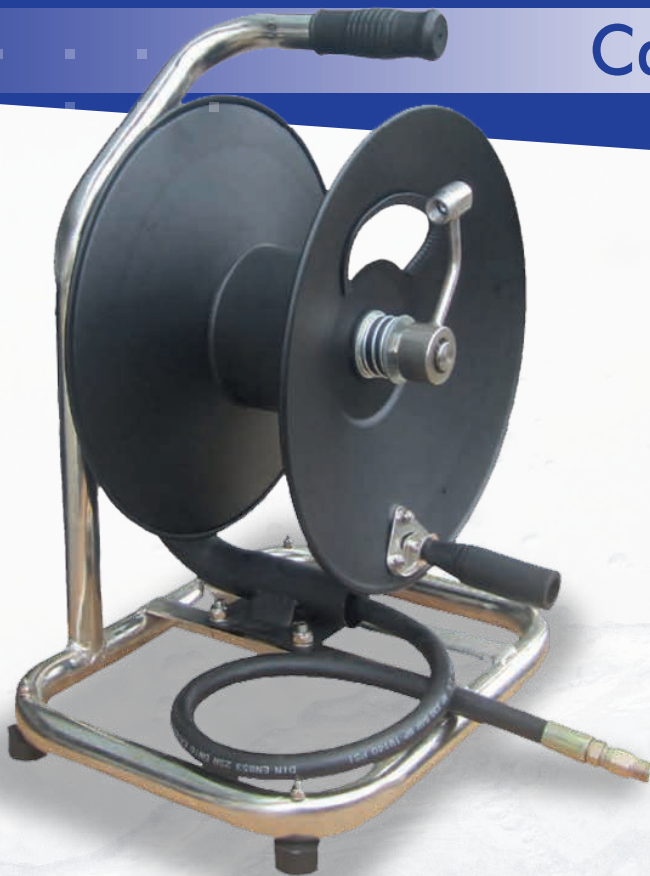

Technical DATA

- Inlet/Outlet 3/8" NPT
- Direct hand-crank rewind with locking pin
- Solid steel construction
- Durable black powder coated finish and galvanized welded drum
- 5000 PSI rated swivel with nickel plated hose mounting arm
- One-piece welded drum
- Max Temp 185°F
- Weight 20.0 lbs
- 3/8" Hose capacity 100 ft
- 1/4" Hose capacity 150 ft

**To Complet
your perfect kit**



Industrial Foot Valve



Sewer Cleaner Hose



**Sewer Nozzle
To Unclogged
or Clean**

**Product may differ from the picture.*

MODEL

FINISHING

PSI

HOSE LENGTH / SIZE

■ 2100357 ■ Powder Coated 5000 PSI 100' - 3/8" OR 150' - 1/4"

■ 2100278 ■ Repair kit

HOSE REEL

Trailer mounted Hose Reel GP



Technical DATA

- Direct hand-crank rewind with locking pin
- Solid steel construction
- Durable powdercoated finish
- 360° swivel rotation
- Robust folding handle
- 180° pivoting hose guide
- Max Temp 250°F
- Adjustable friction lever brake
- Full flow high pressure stainless steel swivels
- Coupler connection to secure hose when not in use

To complet your perfect kit



Mount to a Wall



Pipe Mount



Flat Mounting Kit

**Product may differ from the picture.*

MODEL

FINISHING

PSI

HOSE LENGTH

HOSE SIZE

☐ DHRTM50200 Powder Coated 5000 PSI 100' 3/8"

☐ Wall Mount KIT

☐ Pipe Mount KIT

☐ Flat Mounting KIT