



HOT WATER

Pressure washer



AVAILABLE UP TO*

4000^{PSI}
4.8GPM

120 or 240 volt
(600 volt in option)



PLUG

Nema
6-30P



Nema
6-50P



Technical DATA

Between 2 to 4.8 GPM - 1000 to 4000 PSI depending on the model

Diesel Heated High Pressure Washer. Compact, practical, robust and easy to handle.

- **BELT Drive Pump Low RPM**
- Pressure Unloader with External Bypass.
- 120/240 Volt Electric motor. (600 Volt available on demand).
- Automatic Start/Stop with Delay.
- Thermal valve on pump 145°F.
- Adjustable thermometer 0-250°F on Burner.
- Burner work with 2 combustions chamber. You save up 30% of Fuel.
- Fuel tank 8 gallons with fuel gauge incorporated.
- Roll cage with 4x13" Pneumatic Wheel Available.
- All Panels are Removable.
- Manufactured here in Canada with Canadian Steel.
- 50 feet 3/8" - 6000 PSI Included.
- Lance 36" and 4 nozzles on quick connect Included.

**Customizable at your request.

Available Options (+\$)



Hose Reel




Turbo Nozzle

*Depending on the model.
Image may differ
CSA APPROVED



HOT WATER

Pressure washer

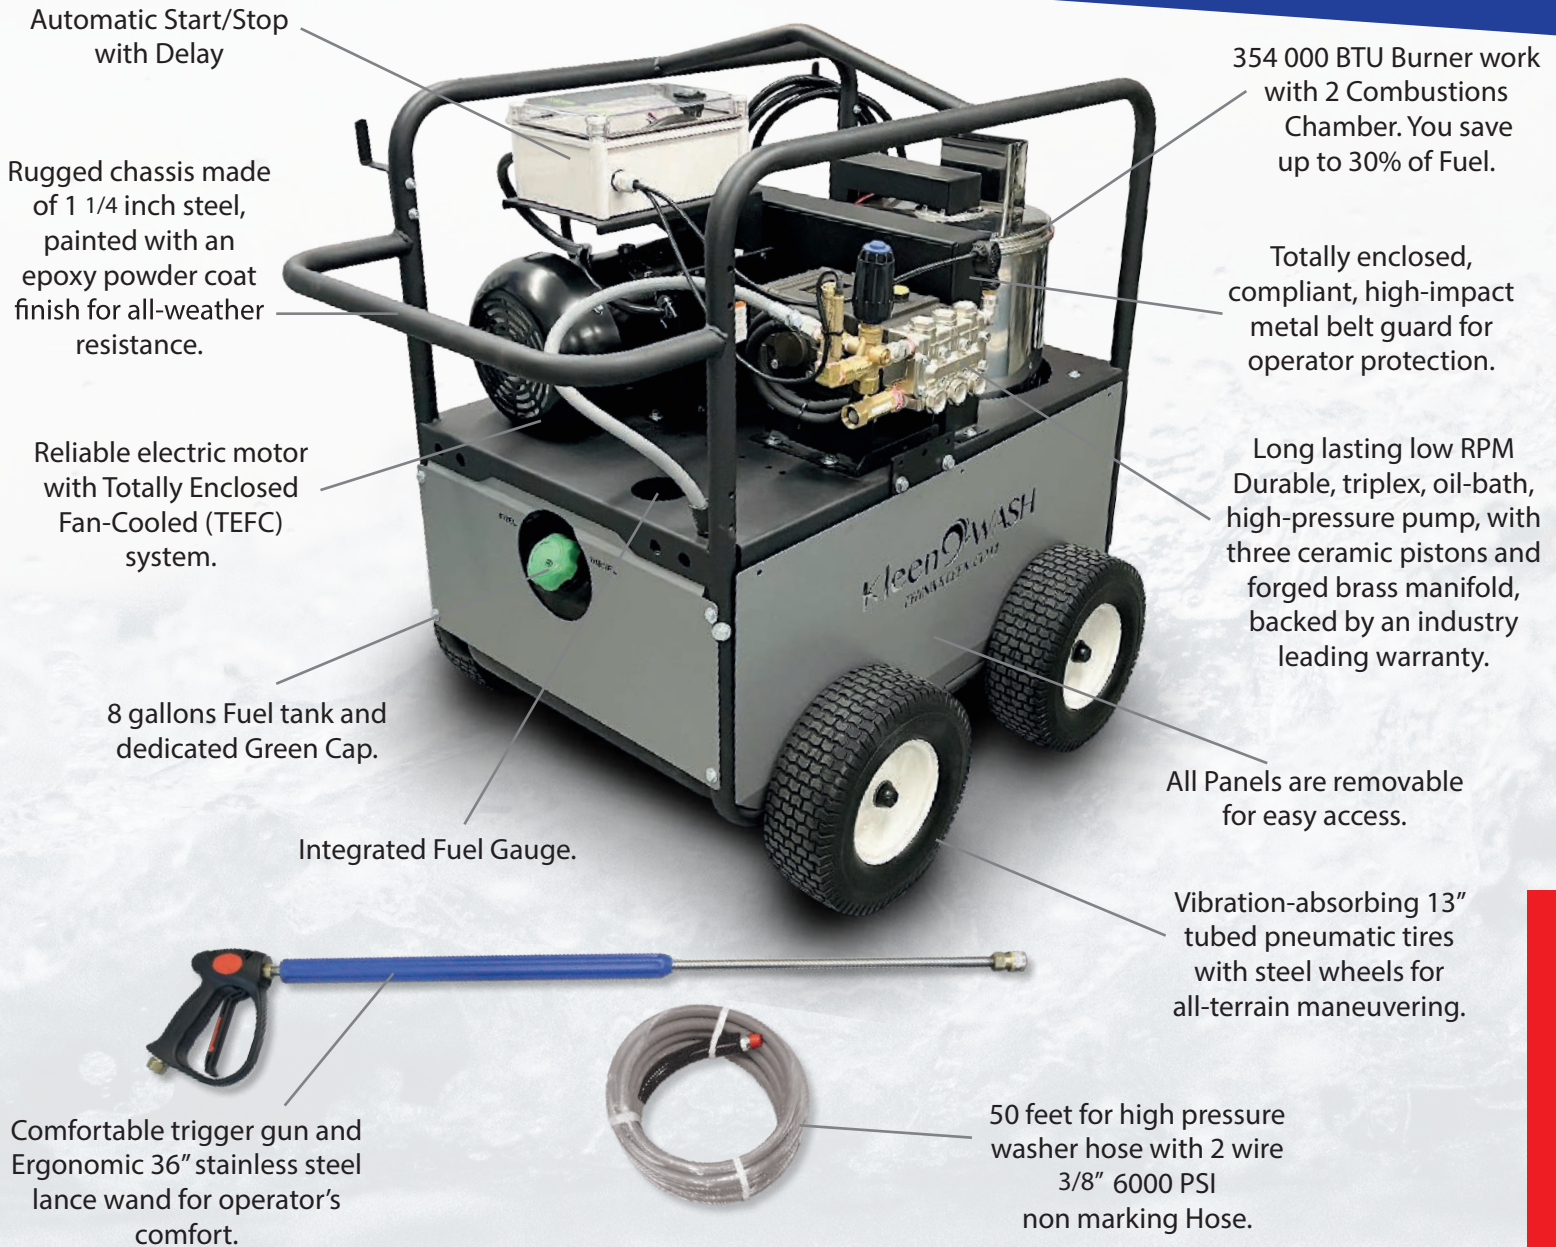

MODEL	PSI	HP	GPM	AMP	VOLT
☐ KW10152SHGP-TST	1000 PSI	1.5 HP	2.0 GPM	20 AMP	120
☐ KW15152SHGP-TST	1500 PSI	1.5 HP	2.0 GPM	20 AMP	120
☐ KW20537SHGP-TST	2000 PSI	5 HP	3.7 GPM	26 AMP	240
☐ KW307535SHAR-TST	3000 PSI	7.5 HP	3.5 GPM	35 AMP	240
☐ KW301048SHGP-TST	3000 PSI	10 HP	4.8 GPM	42 AMP	240
☐ KW35104SHGP-TST	3500 PSI	10 HP	4.0 GPM	42 AMP	240
☐ KW401035SHGP-TST	4000 PSI	10 HP	3.5 GPM	42 AMP	240