



HOT WATER


Pressure washer



AVAILABLE UP TO*

4000^{PSI}
4.8GPM

120 or 240 volt
(600 volt in option)



Technical DATA

Between 2 to 4.8 GPM - 1000 to 4000 PSI depending on the model

Diesel Heated High Pressure Washer. Compact, practical, robust and easy to handle.

- **DIRECT Drive Pump**
- Pressure Unloader with External Bypass.
- 120/240 Volt Electric motor. (600 Volt available on demand).
- Automatic Start/Stop with Delay.
- Thermal valve on pump 145°F.
- Adjustable thermometer 0-250°F on Burner.
- Burner work with 2 combustions chamber. You save up 30% of Fuel.
- Fuel tank 8 gallons with fuel gauge incorporated.
- Roll cage with 4x13" Pneumatic Wheel Available.
- All Panels are Removable.
- Manufactured here in Canada.
- 50 feet 3/8" - 6000 PSI Included.
- Lance 36" and 4 nozzles on quick connect Included.

**Customizable at your request.

Available Options (+\$)



Hose Reel




Turbo Nozzle

*Depending on model.
Image may differ.
CSA APPROVED



HOT WATER

Pressure washer

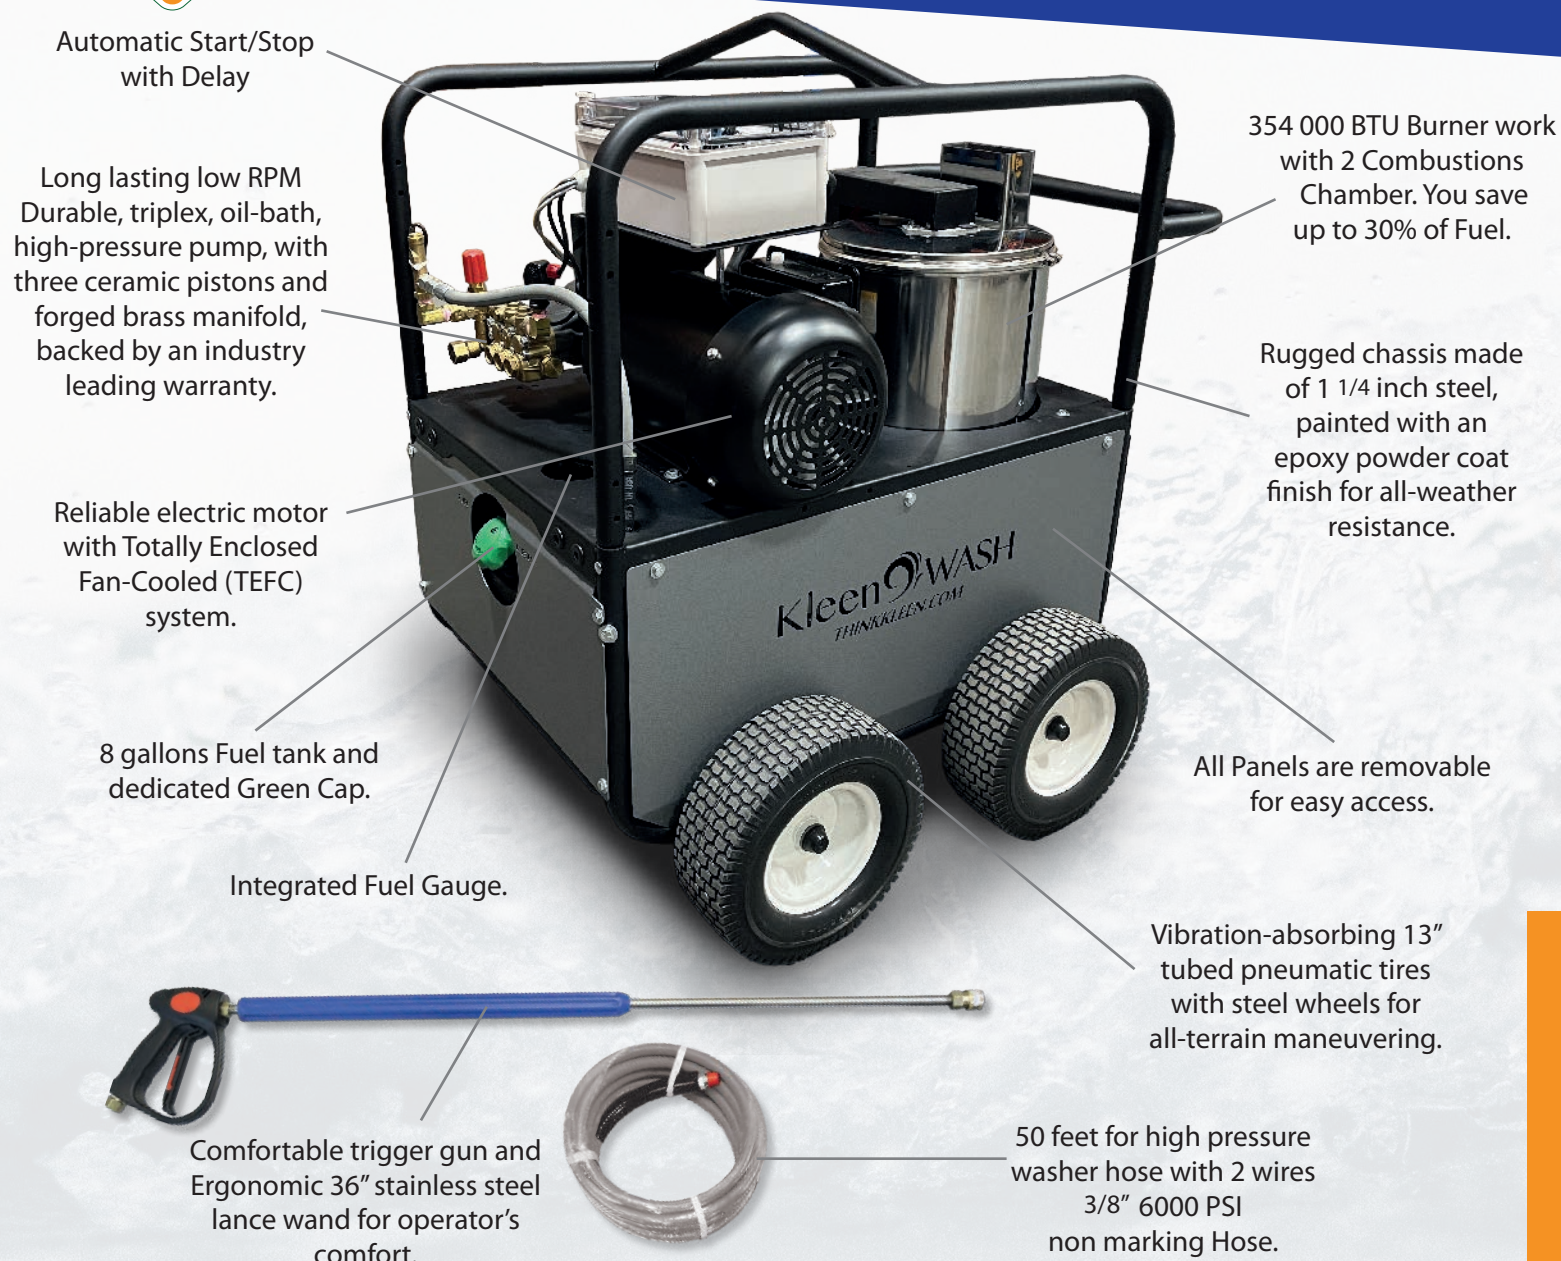

Automatic Start/Stop with Delay

Long lasting low RPM Durable, triplex, oil-bath, high-pressure pump, with three ceramic pistons and forged brass manifold, backed by an industry leading warranty.

Reliable electric motor with Totally Enclosed Fan-Cooled (TEFC) system.

8 gallons Fuel tank and dedicated Green Cap.

Integrated Fuel Gauge.

354 000 BTU Burner work with 2 Combustions Chamber. You save up to 30% of Fuel.

Rugged chassis made of 1 1/4 inch steel, painted with an epoxy powder coat finish for all-weather resistance.

All Panels are removable for easy access.

Vibration-absorbing 13" tubed pneumatic tires with steel wheels for all-terrain maneuvering.

Comfortable trigger gun and Ergonomic 36" stainless steel lance wand for operator's comfort.

50 feet for high pressure washer hose with 2 wires 3/8" 6000 PSI non marking Hose.

MODEL	PSI	HP	GPM	AMP	VOLT
 KW10152HGP-TST	1000 PSI	1.5 HP	2.0 GPM	20 AMP	120
 KW15152HGP-TST	1500 PSI	1.5 HP	2.0 GPM	20 AMP	120
 KW20537HGP-TST	2000 PSI	5 HP	3.7 GPM	26 AMP	240
 KW307535HAR-TST	3000 PSI	7.5 HP	3.5 GPM	35 AMP	240
 KW301048HGP-TST	3000 PSI	10 HP	4.8 GPM	42 AMP	240
 KW35104HGP-TST	3500 PSI	10 HP	4.0 GPM	42 AMP	240
 KW401035HGP-TST	4000 PSI	10 HP	3.5 GPM	42 AMP	240