



DIRECT DRIVE 240V


Pressure washer



AVAILABLE UP TO*

4000 PSI
4.8 GPM


240 volt
20 to 42 amp



Available Options (+\$)



Hose Reel

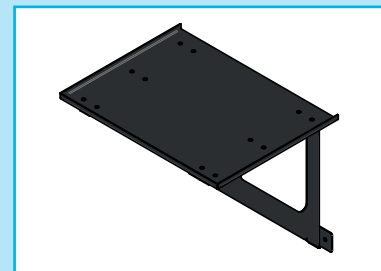

Wall Support

*Product may differ from the picture. Automatic start/stop shown.

Technical DATA

Available up to 4.8 GPM - 4000 PSI

- DIRECT DRIVE - Triplex pump Low RPM
- External adjustable unloader with bypass
- 5 HP to 10 HP Electric motor, TEFC, 1750 RPM, 240V, 1.15 Service factor.
- Powder coated frame, fixed or mobile
- Include: 50 feet 3/8" - 4000 PSI
- Lance 36" and 4 nozzles on quick connect
- Standard pressure washer gun
- Thermal valve 140°F on pump
- 20 feet of extension cord:
 - Nema 6-30P for 20 Amp
 - Nema 6-50P for 33 Amp

Available Accessories/Options

- | | |
|--|---------------------------------------|
| <input type="checkbox"/> Manual Start and Stop | <input type="checkbox"/> Mobile Frame |
| <input type="checkbox"/> Hose Reel | <input type="checkbox"/> Wall Support |
| <input type="checkbox"/> Turbo nozzle | <input type="checkbox"/> Foamer |
| <input type="checkbox"/> Floor cleaner | |

- | | | |
|---------------------------------------|-------------------------------------|--|
| <input type="checkbox"/> General Pump | <input type="checkbox"/> AR Pump | <input type="checkbox"/> Hot Kit 185°F |
| <input type="checkbox"/> Udor Pump | <input type="checkbox"/> Comet Pump | |



DIRECT DRIVE 240V

Pressure washer

***OPTIONAL**

Automatic START & STOP device, to keep your investment in pristine condition.

Quick-release couplers and tangle-free.

High Quality External Unloader with external Bypass for Better durability and performance.

Long lasting low RPM Durable, triplex, oil-bath, high-pressure pump, with three ceramic pistons and forged brass manifold, backed by an industry-leading warranty.

Comfortable trigger gun and Ergonomic 36" stainless steel lance wand for operator's comfort.

Reliable electric motor with Totally Enclosed Fan-Cooled (TEFC) system.

***OPTIONAL**

Mobile Frame made of 1"1/4 steel, painted with an epoxy powder coat finish for all-weather resistance.

Vibration-absorbing 13" tubed pneumatic tires with steel wheels for all-terrain maneuvering.

Frame Made with Canadian zinc plated Steel 12 GA for durable and Rust free for years.

50 feet for high pressure washer hose with 1 wire 3/8" 4000 PSI non marking Hose.

**Product may differ from the picture. Automatic start/stop shown with Mobile frame.*

MODEL	PSI	HP	GPM	AMP	PLUG	VOLT
KW15548	1500 PSI	5 HP	4.8 GPM	20 AMP	6-30P	240
KW18540	1800 PSI	5 HP	4.0 GPM	20 AMP	6-30P	240
KW20537	2000 PSI	5 HP	3.7 GPM	20 AMP	6-30P	240
KW25530	2500 PSI	5 HP	3.0 GPM	20 AMP	6-30P	240
KW227548	2200 PSI	7.5 HP	4.8 GPM	33 AMP	6.50P	240
KW287540	2800 PSI	7.5 HP	4.0 GPM	33 AMP	6-50P	240
KW307535	3000 PSI	7.5 HP	3.5 GPM	33 AMP	6-50P	240
KW301048	3000 PSI	10 HP	4.8 GPM	42 AMP	6-50P	240
KW401055	4000 PSI	10 HP	3.5 GPM	42 AMP	6-50P	240